


# Characteristic of the temperature sensor



The swimming pool temperature sensor (NTC) has the following resistance values at different temperatures:.

Temperature (°C)	Resistance (kOhm)
0	14,9
5	11,7
10	9,2
15	7,3
20	5,9
25	4,7
30	3,8
35	3,1
40	2,6
45	2,1
50	1,7

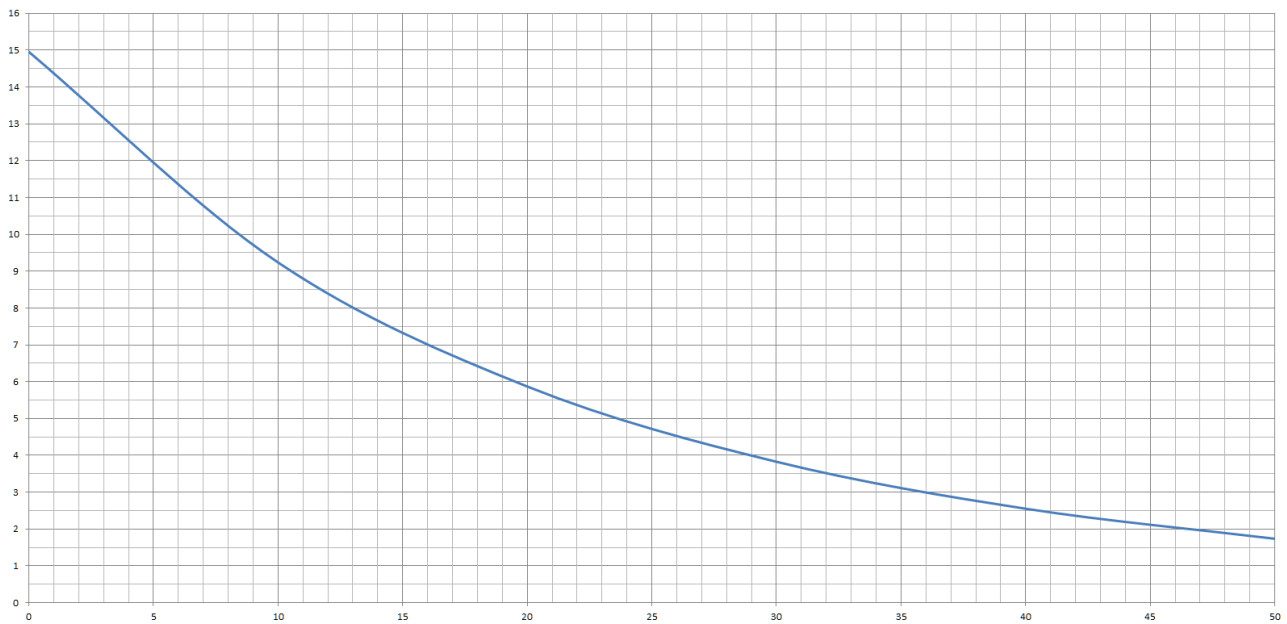