




# Product Information

## Pool-Control with solar regulation

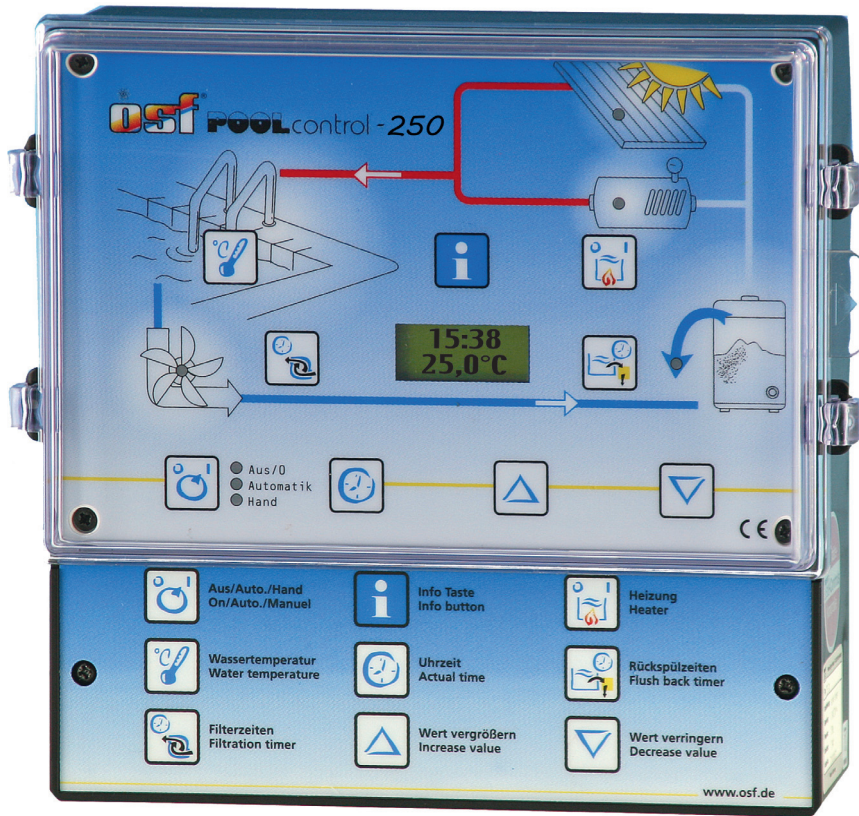

### POOL-CONTROL-250

New comfortable micro processor control for a modern swimming pool. The mains connection is possible alternatively with 400V and 230V. A digital display indicates both the water temperature and the time.

By pressing the information button „i“, the temperature sensor values, the counter for hours of operation, the language of the country and additional equipment information are indicated in the display. A back wash control for two rod valves (back wash and clear rinsing) and an anti-icing function for outdoor swimming pools have been integrated as a standard. The anti-icing function may be switched, if required.

backwashing with pneumatic valve or 6-way-valve possible

The control range of the temperature control ranges from 0°C to 40°C. By connecting a solar temperature sensor, the solar control is automatically activated. The electronic filterpump protection with a set area from 0 to 8A is adjusted with the info key. As a standard, the control is equipped with a counter for hours of operation for the filter pump, heating and solar heating and with a back wash counter thus facilitating system dependent energy management.

In addition to the 230V switching output, the heating can be switched by a potential-free relay output. With this contact a central heating can be switched. A potential-free relay output for the dosing equipment is also available.

Due to the integrated diagnostic connector on the circuit board, an OSF service terminal can be connected.

For the protection of the heating, the after-running of the filter pump – available as a standard – can be activated.

Furthermore, connecting options for our collecting tank control NR-12-TRS-2 and for the back wash control EUROTRONIK-10 are available.

### Connecting diagramm

### POOL-CONTROL-250

L1	L2	L3	N	U1	V1	W	WSK	U2	N	U3	N	U4	N	U5	U6	N	2	3	4	5	11	12	13	14	20	21	22	23	30	31	32	33
mains 400/230V 50Hz				filterpump 400V			safety contact filterpump	heating 230V	pneumatic backwash valve	pneumatic rinsing valve			solar- actuating drive 230V			backwach automatic EUROTRONIK-10	water level control NR-12-TRS-2				chemical control potential-free	heating potential-free	temperature sensor water	temperature sensor solar								

### Technical data

### POOL-CONTROL-250

nominal voltage	3/N/PE 400/230V/50 Hz
pump switching capacity	3,0 kW AC3
heating switching capacity 230V	2V 230V
heating switching capacity potential-free	8A (230V)
switching capacity chemical control	8A (230V)
ingress protection	IP 40
housing size	220 x 220 x 100
temperature range	0°C bis +40°C
hysteresis	0,2K
sensor element	NTC

Subject to modifications! 03/11



Member of

osf Hansjürgen Meier · Elektrotechnik und Elektronik GmbH & Co KG



Postfachanschrift:  
Postfach 1405  
D-32328 Espelkamp

Hausanschrift:  
Eichendorffstraße 6  
D-32339 Espelkamp

Telefon +49 5772 9704-0  
Telefax +49 5772 5730

E-Mail: info@osf.de  
Internet: www.osf.de

